


Maintenance Instructions

HS-PORTAL KF

Lift and slide fittings for PVCu doors

HS-PORTAL LM

Lift and slide fittings for aluminium doors

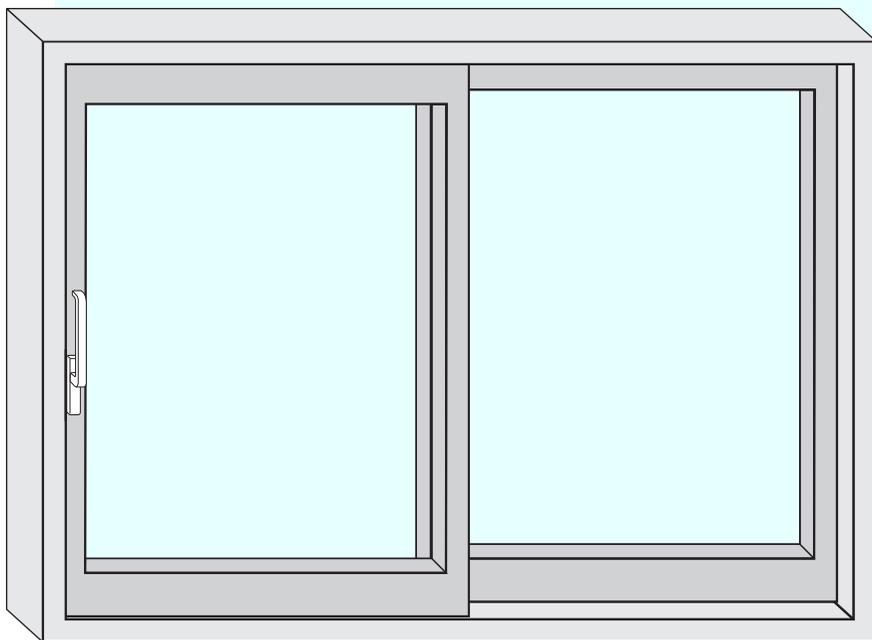


Druckstand: 0111/Ha/0,5

18174_3_04.02/1



Special Notes:

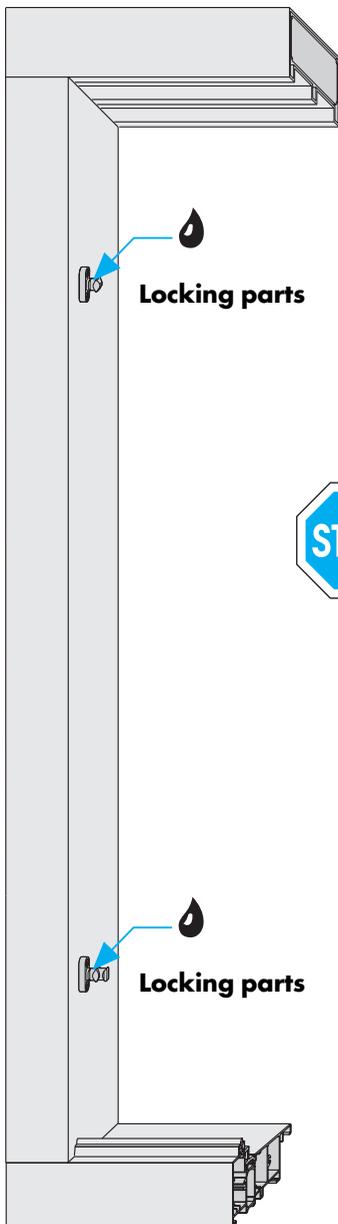

Your windows are fitted with high quality components from SIEGENIA. To ensure their smooth and trouble free operation you must carry out the following maintenance on them at least **once a year**:

1. Lubricate or oil all locking parts (👉).
2. Use **only** clean and non-resinous grease or oil.
3. **Only** clean your windows with a mild, neutral pH, diluted detergent. Never use aggressive, acid based detergents or scouring powder because they can damage the protective surface of your hardware.

To maintain the surface quality we recommend the following preventative measures:

4. After cleaning the hardware surface treat with a silicon and corrosion free (ie non-acidic) oil, eg: sewing machine oil.

Warning! The following work should only be performed by an experienced window tradesman:

- the replacement of fittings
- the assembly/dismantling of sliding sashes

These maintenance instructions are also valid for other fittings and window types that are not mentioned here.

Your Window specialist: